












RØDELink LAV is a professional-grade wearable microphone designed for use in a wide range of applications. The locking TRS connector is designed to pair perfectly with the RØDELink range of wireless microphones and most recorders with a 3.5mm locking microphone input.

- Professional-grade lavalier mic with 3.5mm TRS locking connector
- High-quality omnidirectional condenser capsule
- Discreet 4.5mm miniature microphone
- Kevlar® reinforced cable
- Includes pop shield and durable mounting clip



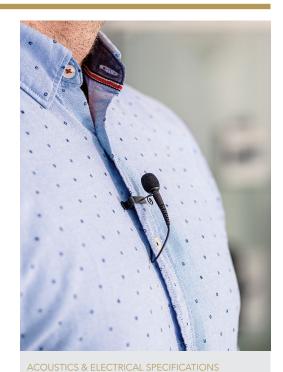

ACOUSTICS & ELECTRICAL SI ECII ICATIONS	
Acoustic Principle:	Permanently Polarised Condenser
Polar Pattern	Omni-directional
Frequency Range	20Hz – 20kHz
Maximum SPL	110 dB SPL (@ 1kHz, 1% THD into 1 Ω load)
Sensitivity	-33.5db re 1 Volt/Pascal (21.00mV @ 94 dB SPL) +/- 2dB @ 1kHz
Dimensions	1200.00mmH x 4.50mmW x 4.50mmD
Output Impedance	3k Ω Typical
Signal To Noise Ratio	67 dB
Equivalent Noise	27 dB Typical
Dynamic Range	83dB Typical

POLAR PATTERN

